


Update to the SAF Two-Side Axle Lift for INTRA Series With Aluminium Hanger Brackets


Now that the two-side lift for steel hanger brackets has been updated, the version for aluminium hanger brackets is also to be adapted to make its installation much easier.

- No dismantling of the spring bearing during installation
- No need to change to the longer spring bearing screw
- Reduction in the time needed for installation thanks to hinged side part.

Part: **03 027 1244 01**

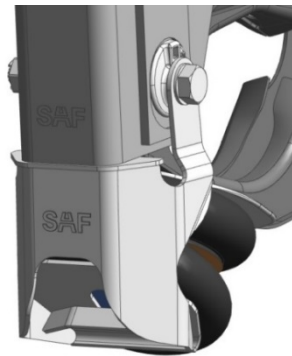

to be replaced by: **03 027 1280 01**

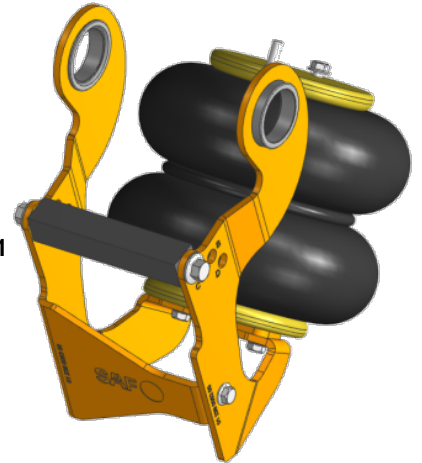


- This means it has been possible to reduce the weight per axle by 3 kg to 22 kg.
- Highly corrosion resistant thanks to cathodic electrodeposition (CED) coating (504h salt-spray testing).
- The lift arms can be painted over.

The lift can be adjusted according to the construction height and **can thus be used with all standard products in the SAF INTRA product family.**

The lift arm has several possible support positions. You will find details of how to align the series (combination of hanger bracket / air suspension bracket and airbag) with the support position in the installation instructions and in the [design manual](#).

It is essential to ensure the lift arm extends the correct distance (a) beyond the hanger bracket depending on the support position:

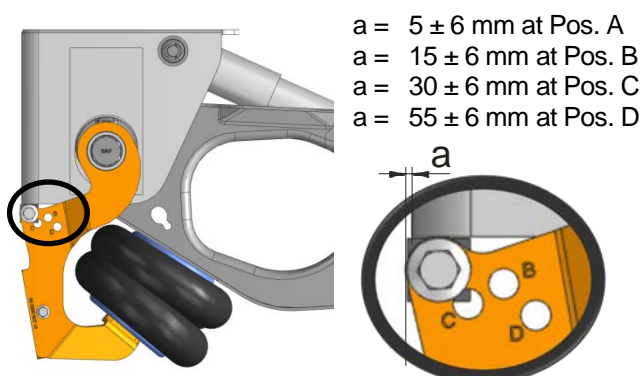

Picture shows 03 027 1280 01 – “unfolded”

The switchover from the existing lift, part no. 03 027 1244 01, to the new lift with part no. 03 0127 1280 01 is to take place at the end of Q1-2017.