


HOLLAND RLU SERIES

LOW PROFILE,
ON/OFF HIGHWAY
TRAILER AIR
SUSPENSIONS



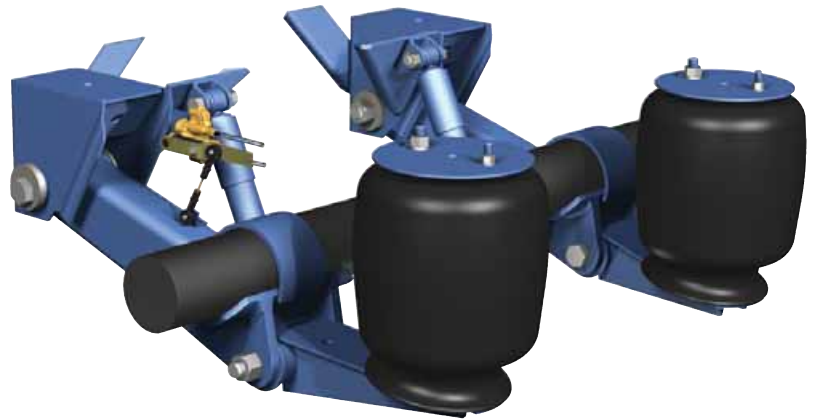

SAF-HOLLAND Group

RLU SERIES AIR-RIDE SUSPENSION

22,500 & 25,000 lbs.
(10,206 & 11,340 kg) **CAPACITY**

OPTIONS

- EZ-Align® on both sides
- Air Control Kits
- Down-Straps

RIGID TRAILING ARMS


extends brake and tire life through better load equalization.

OPTIONAL AIR CONTROLS

Kits featuring leveling, pressure protection, and exhaust valves are available for a wide range of vehicle applications.

FORWARD MOUNT SHOCKS

Saves installation time and increases under trailer space for other components.

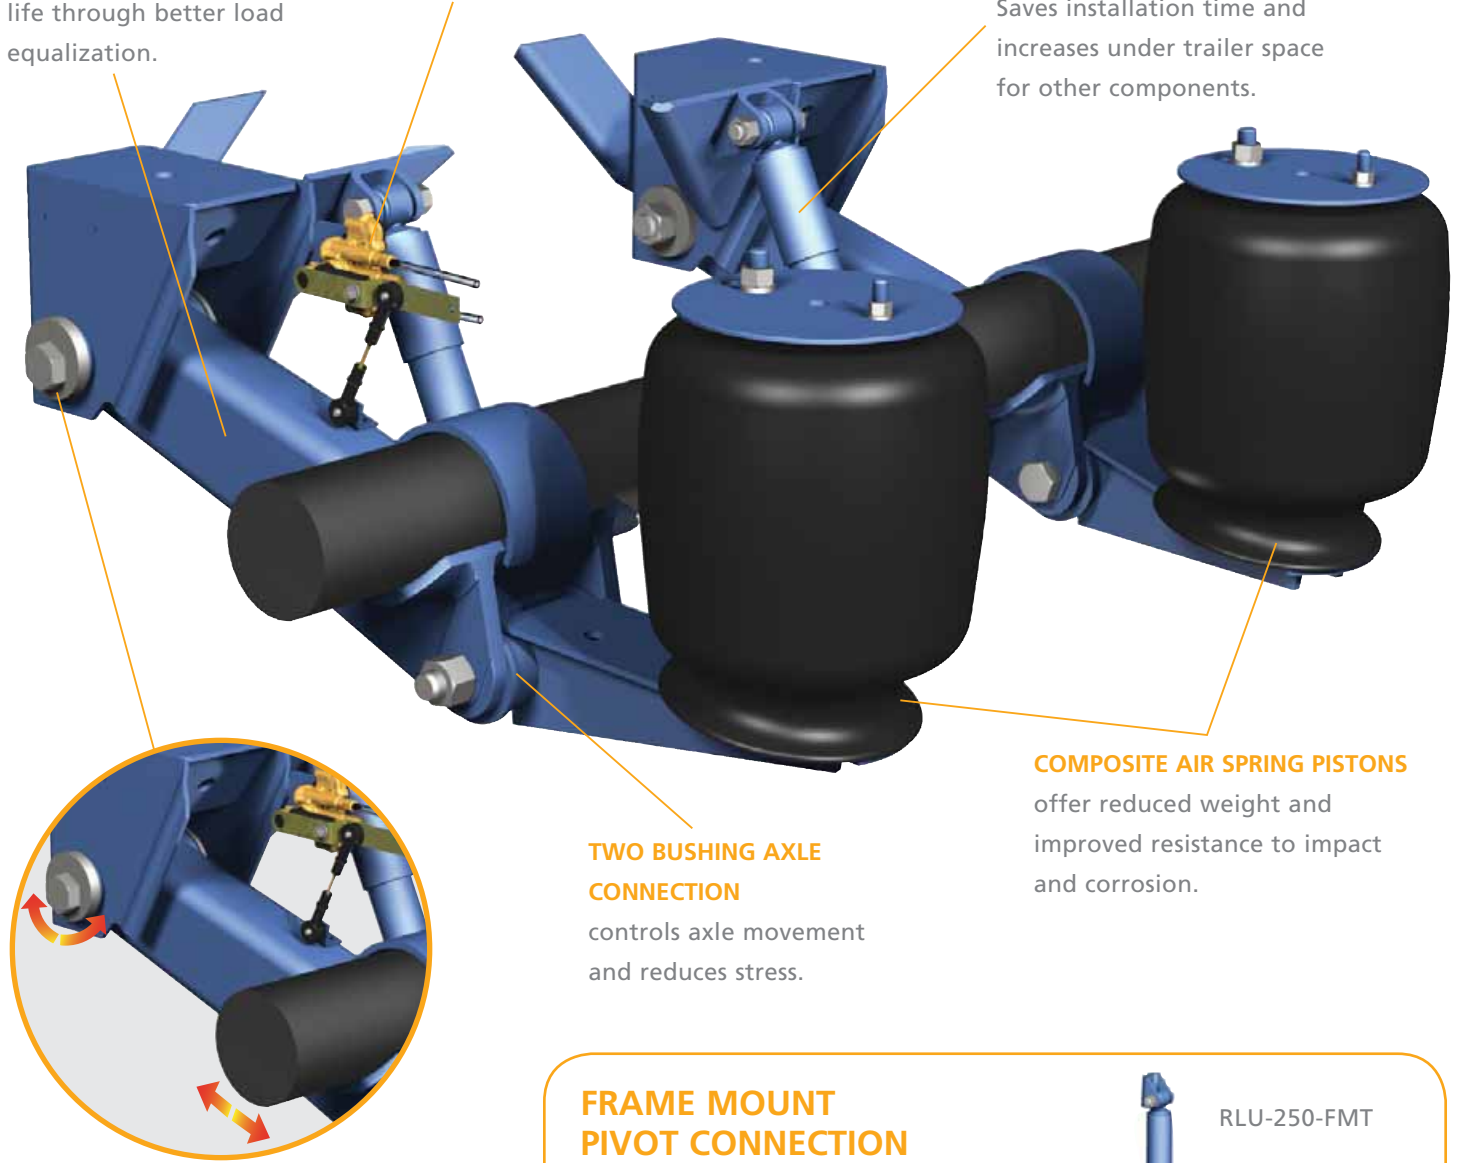

EZ-ALIGN™

Alignment system requires no special replacement parts or disassembly.

TWO BUSHING AXLE CONNECTION


controls axle movement and reduces stress.

COMPOSITE AIR SPRING PISTONS

offer reduced weight and improved resistance to impact and corrosion.

FRAME MOUNT PIVOT CONNECTION

Allows for optimum deck space, larger cargo capacity, and excellent ground clearance for lowboy (double drop) applications.

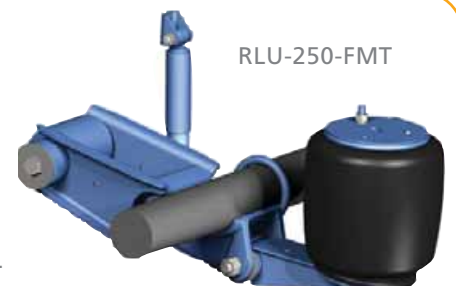




RLU-250-FMT

MODEL SPECIFICATIONS

RLU-228

CAPACITY	TANDEM AXLE SPACING		WHEEL SIZE
	MIN.	MAX.	
22,500 LBS. (10,206 KG)	45.5	122.0	15/20/22

MODEL	RIDE HEIGHT	AXLE TRAVEL		SUSP. WEIGHT (Complete)	"A"	LIFT AXLE
		TOTAL	UP			
RLU-228-6-3	6.0	7.5	2.5	345	6.00	NO
RLU-228-7-3	7.0	8.0	3.0	352	7.25	
RLU-228-8-3	8.0	8.0	3.0	357	8.25	
RLU-228-9-3	9.0	8.0	3.0	360	8.25	
RLU-228-10-3	10.0	8.0	3.0	372	10.59	
RLU-228-8-4	8.0	8.0	4.0	352	7.25	YES
RLU-228-9-4	9.0	8.5	4.0	357	8.25	
RLU-228-10-4	10.0	9.4	4.1	372	10.59	
RLU-228-12-4	12.0	8.0	4.75	376	11.25	

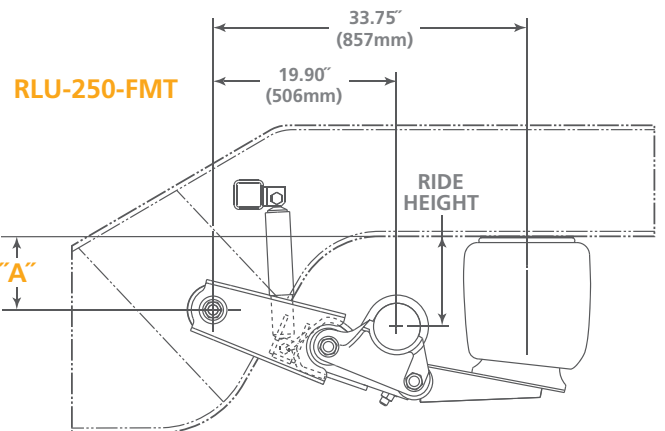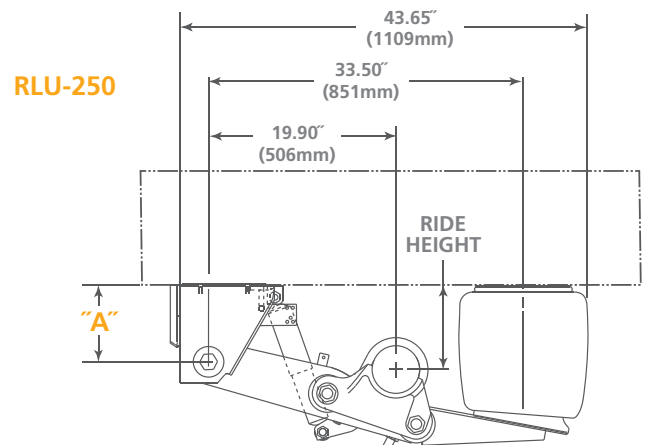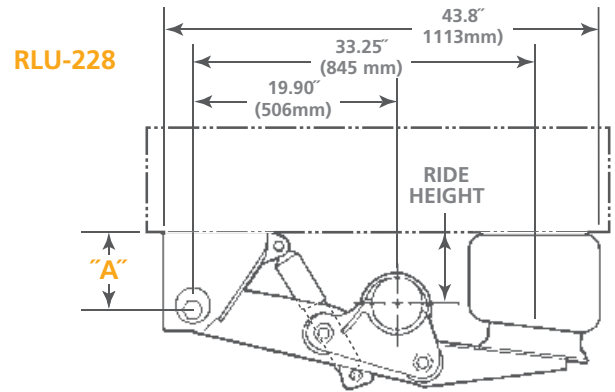

RLU-250

RLU-250 and RLU-250-FMT MODELS
Both utilize the same air springs and shock absorbers

CAPACITY	TANDEM AXLE SPACING		WHEEL SIZE
	MIN.	MAX.	
25,000 LBS. (11,340 KG)	45.5	122.0	15/20/22

MODEL	RIDE HEIGHT	AXLE TRAVEL		SUSP. WEIGHT (Complete)	"A"	LIFT AXLE
		TOTAL	UP			
RLU-250-6.5	6.5	8.9	2.5	368	5.25	NO
RLU-250-9	9.0	8.5	4.0	380	8.25	YES
RLU-250-12	12.0	9.3	4.65	399	8.25	YES
RLU-250-FMT-6.5	6.5	9.0	2.5	413	5.25	NO
RLU-250-FMT-9	9.0	8.5	4.0	425	8.0	NO
RLU-250-FMT-12	12.0	9.3	4.65	444	11.25	NO

RLU SERIES TRAILER APPLICATIONS

- Drop Deck
- Chip Hauler
- Bottom Dump
- Livestock
- Specialty Trailer
- Moving Van
- Grain
- Lowboy (Double Drop)
- Auto Hauler





SAF's legacy started in 1881 when Paul Zill, a blacksmith from Keilberg, Germany developed the Zill two-way plow for the agricultural industry. Mr. Zill's blacksmith shop expanded into a small family operation as popularity for his plow grew and agricultural axles were added to the product line. Time passed - and the family operation evolved to become Otto Sauer Achsen Fabrik (SAF), a leader in the design and manufacture of integrated axle and suspension systems for commercial trailers.

Similar to SAF, Holland's legacy also started in the agricultural industry in 1910 with the introduction of a safety release hitch for horse drawn plows. Founding father, Gerrit Den Besten, began the "Safety Release Clevis Company" in Corsica, South Dakota. The company found new market opportunities in the automotive industry and moved operations to Holland, Michigan. Renamed The Holland Hitch Company, the family owned business grew into a global supplier in the commercial transportation industry.

Today - these two historical companies are together as SAF-HOLLAND, a global leader in the design, manufacture, and distribution of quality engineered components, systems, and services to the commercial vehicle industry.

SAF-HOLLAND specializes in coupling, lifting, and suspension systems for trucks, buses, tractors, and trailers. SAF-HOLLAND products are sold and serviced under the SAF, Holland and Neway brand names from over 4,600 distributor and OEM locations around the world.



From fifth wheel rebuild kits to suspension bushing repair kits, SAF-HOLLAND Original Parts are the same quality components used in the original component assembly. SAF-HOLLAND Original Parts are tested and designed to provide maximum performance and durability. Will-fits, look-alikes or, worse yet, counterfeit parts will only limit the performance potential and could possibly void SAF-HOLLAND's warranty. Always be sure to spec SAF-HOLLAND Original Parts when servicing your SAF-HOLLAND product.

SAF-HOLLAND USA, Inc.
888.396.6501 Fax 800.356.3929

SAF-HOLLAND Canada Limited
519.537.3494 Fax 800.565.7753
Western Canada 604.574.7491 Fax 604.574.0244

www.safholland.com

