


INTEGRAL Bolting on the SAF BI-Series: Changeover to DELTAPROTEKT

SAF-HOLLAND will, with immediate effect, convert to the Chrome VI-free DELTAPROTEKT coating on the INTEGRAL brake disc bolting for the **SAF BI-Series** in the course of continuing product optimisation.

The benefits of this new coating, apart from the Chrome VI-freedom, are the considerably improved corrosion protection of 504 hours salt spray resistance acc. to DIN 50 021 and the good temperature stability.

The new coating on bolts **04 375 1005 12** can be identified by the high quality silver colour (up until now matt black).

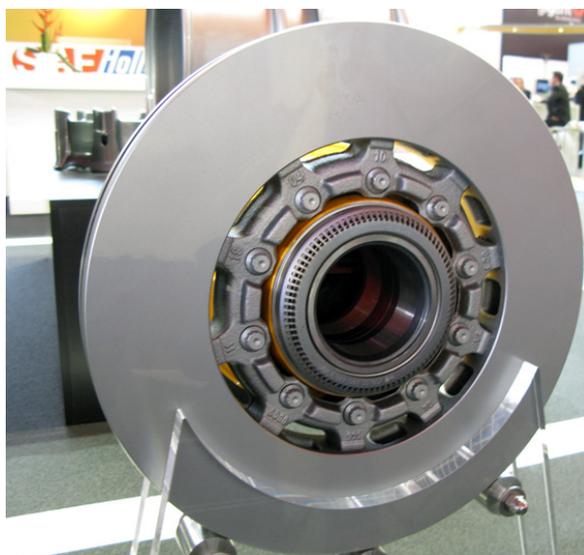

SAF BI-Serie with DELTAPROTEKT-coated INTEGRAL-Bolting

The former tightening process for the brake disc fixing of the **SAF BI-Series** with the new DELTAPROTEKT coating remains the same: Pretighten to **30 Nm** diagonally and then tighten by a further **90° diagonally** (check torque: 130 Nm). The identification number **04 375 1005 12** for the bolt size M12x1.5x75 remains the same.

Please note that when changing the brake discs the bolts **04 375 1005 12** must still be replaced. Bolts which have already been used **may not be used** again!