

Easier installation of the new SAF two-side axle lift for INTRA series with steel hanger brackets

To lighten the installation of the two side axle lift, SAF-HOLLAND has redesigned the lift arms. Now with the new shaped lift arms, when installing, the lift arms are brought into position and **fixated on the side of the lift arm**.

This **optimized accessibility** with the screw on the side of the lift arm makes the installation faster and easier because there is only **one screw** needed. Other parts at the chassis (as a palette box) are not interfering anymore when mounting the lift.

- Also with the revised version the **assembly** of the two-side axle lift is done **without loosening and re-tightening the pivot bolt connection**.
- No conversion to the longer pivot bolt.
- During the optimization measurements the total weight has been **reduced** by 1 kg to 21 kg/axle.
- Well protected against corrosion by KTL coating.
- The lift arms can be painted over.

Depending on the air suspension type, the lift arm position can be adjusted. With this the axle lift can cover **all standard air suspension types** of the SAF INTRA serie. Multiple positions of the support bar on the lift arms are available. The correct positioning of the support bar towards the air suspension type (combination of hanger bracket / air bag bracket and air spring) can be found in the mounting instruction and design manual (<http://designmanual.safholland.de>).


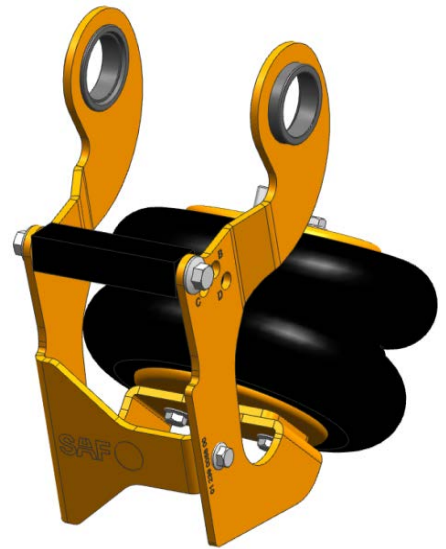


Illustration of axle lift - 03 027 1278 01

The necessary distance from lift to front side of the hanger bracket (a) has been shortened by 15 – 25 mm, depending on the position of the support bar.

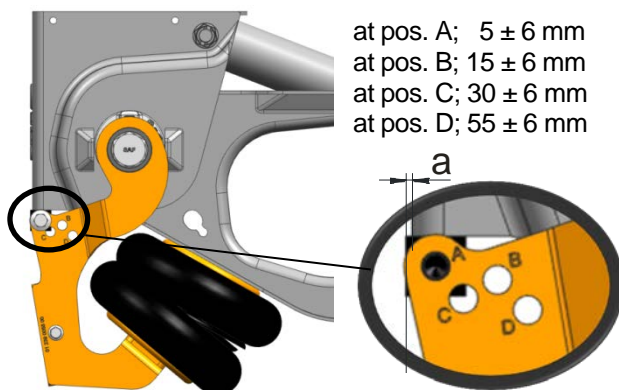

End Q4 2015 will the new two-side axle lift with number 03 027 1278 01 replace the current two-side axle lift with number 03 027 1278 00. A combined installation of both lift systems is possible.