



GO THE DISTANCE.

JS-300-J DOLLY TONGUE JACK



APPLICATION:

Recommended for converter dollies, trailers and single jack requirements.

FEATURES:

Heavy tubular construction with top crank and steel swivel caster with shock absorption capabilities. Other foot options available.

SPECIFICATIONS:

Static Load Capacity: 1,200 lbs.

Lift Capacity: 6,000 lbs.

Crank Turns Per Inch of Travel: 4

Travel: 15"

Wheel Size: 5" diameter

Weight: 36 lbs.

INSTALLATION:

1. Use a mounting structure of sufficient strength to support the rated capacity.
2. Use the hole pattern described on the reverse.
3. Use (4) 1/2" grade 8 fasteners, properly tightened.
4. Provide ample crank swing clearance.

OPERATING INSTRUCTIONS:

1. To Lower Jack:
Crank the leg down using the crank provided. Crank with a counter clockwise rotation until the caster is firmly on the ground and the drawbar eye is at the desired height.
2. To Raise Jack:
Crank the leg up using the crank provided. Crank with a clockwise rotation until maximum road clearance has been obtained.

CAUTION: When raising the jack, be sure the tow bar eye is properly supported.

MAINTENANCE:

For proper performance, the following maintenance steps should be performed every 3 months or sooner under severe conditions.


1. Clean and check for proper operation. Inspect for worn, damaged or missing parts. Replace as required using only Holland parts.
2. Lubricate the inner and outer leg by applying grease through the two grease fittings in the outer leg and one grease fitting on the inner leg. Lubricate the caster axle with a light oil.
3. Check mounting fasteners for proper torque.

GENERAL INFORMATION:

1. Do not modify or add to the product.
2. Wear safety goggles during installation and removal.
3. Never strike any part of the item with a steel hammer.
4. Do not weld on this product without written consent from the factory.

WARNING: THIS EQUIPMENT MUST NOT BE USED OR MAINTAINED IN A CARELESS MANNER.

This product is covered by Holland's Commercial Products Warranty. Holland reserves the right, without giving prior notice, to change specifications and dimensions as designs are altered or improved.

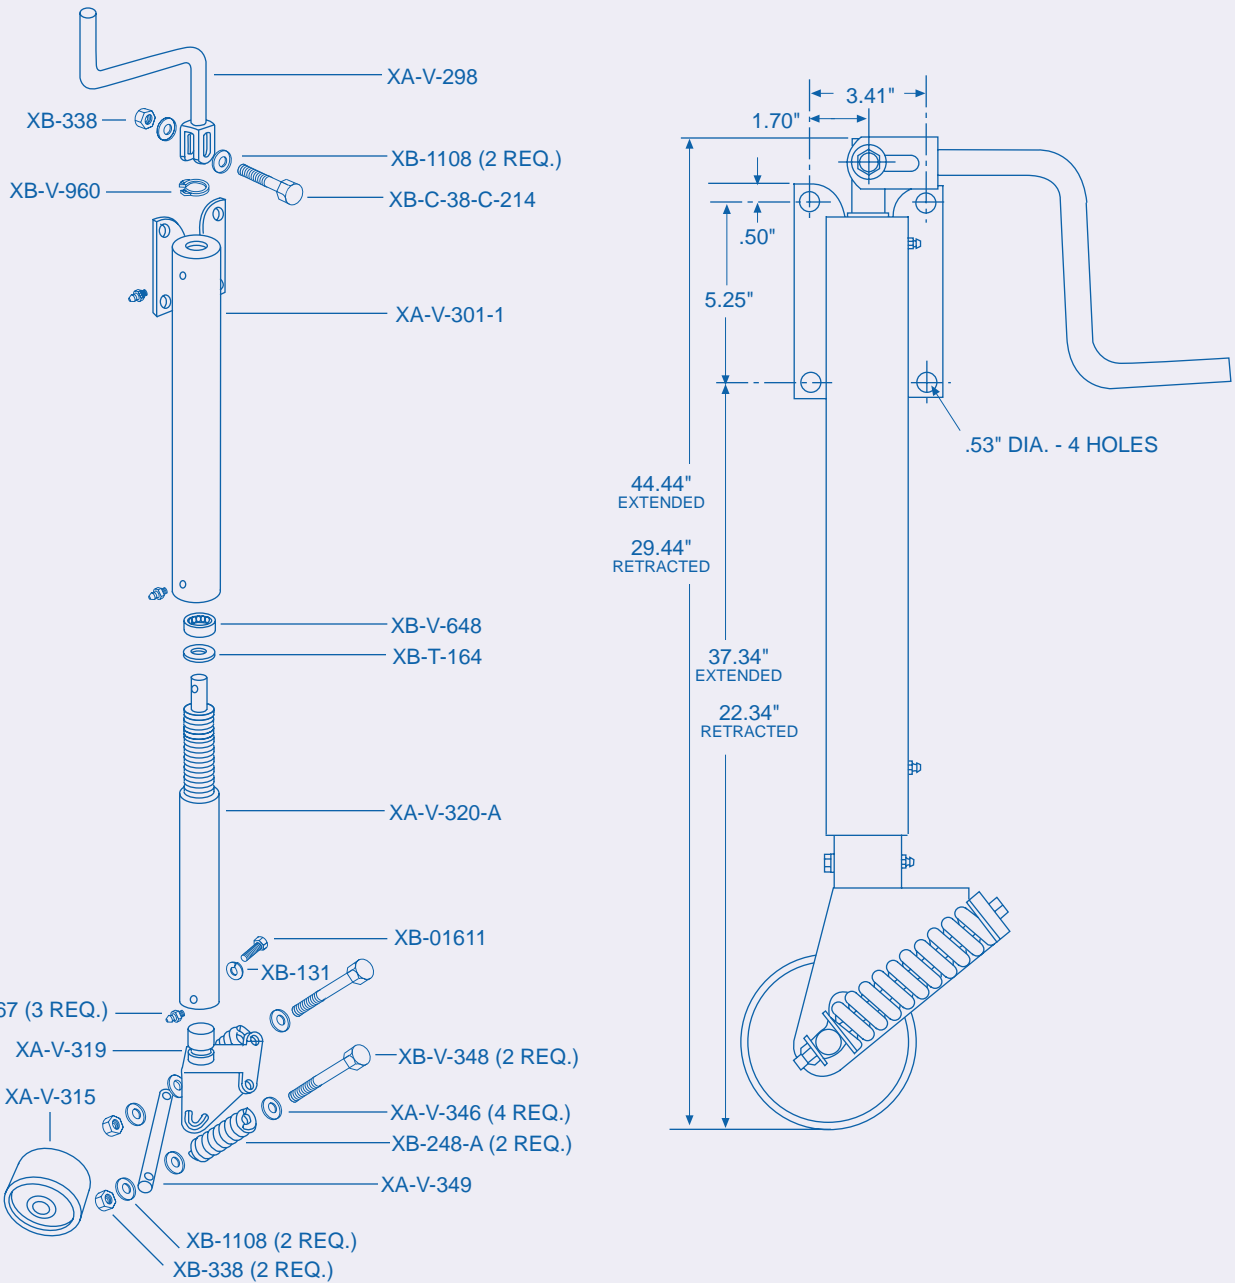

ALL DIMENSIONS SHOWN ARE NOMINAL



★ Holland Hitch Co.
 Holland, MI 49423
 Whitehouse Station, NJ 08889
 Denmark, SC 29042
 Wylie, TX 75098
 Milpitas, CA 95035
 888-396-6501
 FAX 800-769-3299

▲ Holland Binkley Co.
 Warrenton, MO 63383
 636-456-3455
 FAX 636-456-6792

▲ Holland Equipment, Ltd.
 Norwich, Ontario
 Canada N0J 1P0
 519-863-3414
 FAX 519-863-2398

▲ Holland Binkley Co.
 Axle Products Division
 Delphos, OH 45833
 419-692-6015
 FAX 419-692-0503

✦ Euro-Hitch, GmbH
 Schloss Holte
 Germany
 49-(0)5207-89560
 FAX 49-(0)5207-895656

✦ Holland Neway
 International, Inc.
 Muskegon, MI 49442
 231-773-3271
 FAX 231-766-3893

✦ Eurohitch (U.K.), Ltd.
 Tipton, West Midlands
 United Kingdom
 44-(0)121-520-6116
 FAX 44-(0)121-520-6070

✦ Holland Europe, Ltd.
 Hartlebury, United Kingdom
 44-(0)1299-254400
 FAX 44-(0)1299-251664

Holland Transtrade
 Far East SDN BHD
 Shah Alam, Malaysia
 60-(0)3-734-2888
 FAX 60-(0)3-736-5588

★ Holland Hitch of Canada, Ltd.
 Woodstock, Ontario
 Canada N4S 7Z5
 519-537-3494
 FAX 800-565-7753

Holland Transtrade
 (Thailand) Company, Ltd.
 Bangkok, Thailand
 66-(0)2-513-8758
 FAX 66-(0)2-513-8757

Nippon Holland, Ltd.
 Tokyo, Japan
 81-(0)3-3461-9130
 FAX 81-(0)3-3463-1407

★ Holland Hitch Western, Ltd.
 Surrey, British Columbia
 Canada V3S 5K1
 604-574-7491
 FAX 604-574-0244

✦ Holland Hitch (Aust.) Pty. Ltd.
 Melton, Victoria, Australia
 61-(0)3-9743-6799
 FAX 61-(0)3-9747-9617

Copyright © April 2000 The Holland Group, Inc.