




WEIGHTSAVER®

WEIGHTSAVER®

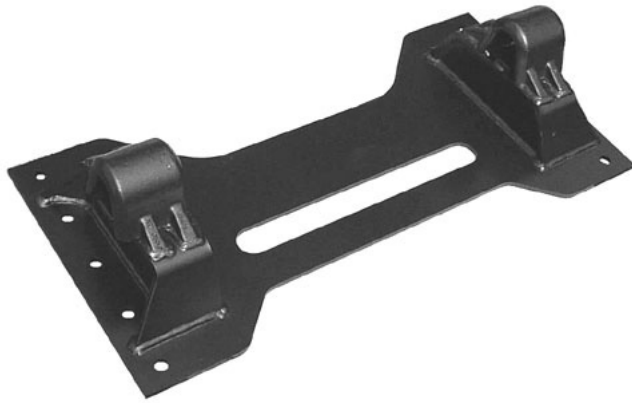

Weightsaver®

20000 kg maximum Vertical Load
150 kN D-Value

EC approved 94/20/EG



WARNING

The load limits given are valid for operation on paved roads and under conditions prevailing in Europe. For alternative conditions please consult Holland


FEATURES OF THE WEIGHTSAVER®

- The Weightsaver® is suitable for all Holland Eurohitch standard 2" Fifth Wheels and saves weight and installation time on fifth wheel mounting
- The combined mounting plate and brackets result in a **reduction of weight**
- **Time-saving** through direct mounting on chassis.
- The Weightsaver® offers safety and highest standards
- Mounting heights including Fifth Wheel are 140 mm, 160 mm, 190 mm, 230 mm
- Production in accordance with EC 94/20 standard
- Two standard hole patterns, Special hole patterns on request
- The Weightsaver® is available in two alternative widths, 965 mm and 1050 mm



WARNING

Mounting must be carried out in accordance with Holland instructions.

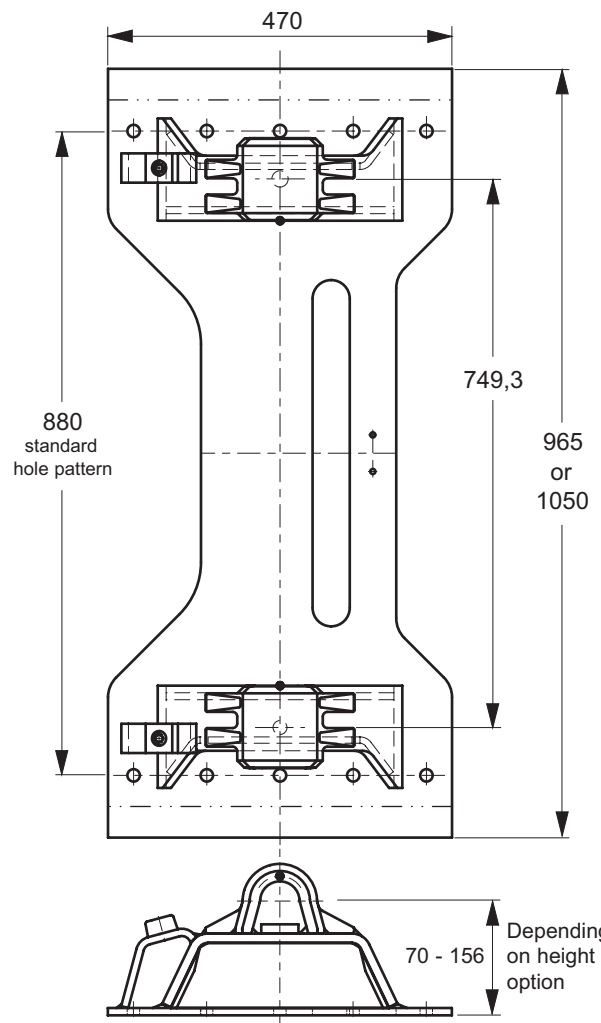


Holland reserve the right, without prior notice, to change specifications and dimensions.

PART NUMBER GUIDE


Height 140 mm (incl. Fifth Wheel)

Part No.	Width	Description
XA-E-60080	965 mm	Standard Weightsaver® undrilled
XA-E-60080-1	1050 mm	Weightsaver® undrilled
XA-E-60080-**	965 mm	Standard Weightsaver® with hole pattern
XA-E-60080-1-**	1050 mm	Weightsaver® with hole pattern




Height 160 mm (incl. Fifth Wheel)

Part No.	Width	Description
XA-E-08523-1	965 mm	Standard Weightsaver® undrilled
XA-E-08523-2	1050 mm	Weightsaver® undrilled
XA-E-08523-1-**	965 mm	Standard Weightsaver® with hole pattern
XA-E-08523-2-**	1050 mm	Weightsaver® with hole pattern




Height 190 mm (incl. Fifth Wheel)

Part No.	Width	Description
XA-E-08523-3	965 mm	Standard Weightsaver® undrilled
XA-E-08523-4	1050 mm	Weightsaver® undrilled
XA-E-08523-3-**	965 mm	Standard Weightsaver® with hole pattern
XA-E-08523-4-**	1050 mm	Weightsaver® with hole pattern



Height 230 mm (incl. Fifth Wheel)


Part No.	Width	Description
XA-E-08523-5	965 mm	Standard Weightsaver® undrilled
XA-E-08523-6	1050 mm	Weightsaver® undrilled
XA-E-08523-5-**	965 mm	Standard Weightsaver® with hole pattern
XA-E-08523-6-**	1050 mm	Weightsaver® with hole pattern



Hole pattern

** Suffix	Dimensions		
	A	B	C
D (Standard)	880	100	ø17
S (Standard)	880	100	ø19
F	880	100	ø21
G	880	101.6	ø18
M	855	100	ø21
R	900	101.5	ø17

Alternative hole patterns on request

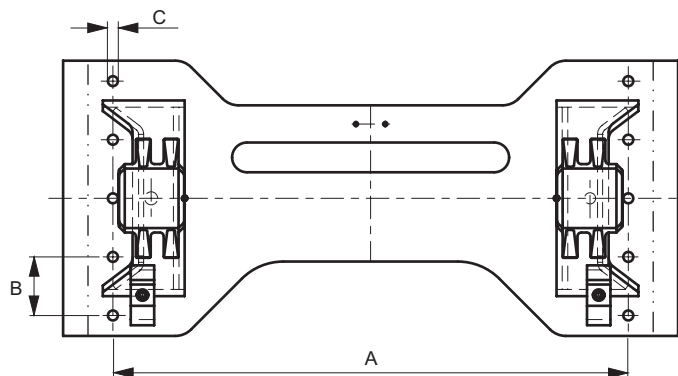

SAF-HOLLAND GmbH
Hauptstraße 26
D-63856 Bessenbach, Germany
Phone: +49 (0) 6095-301302
Fax: +49 (0) 6095-301200

HOLLAND EUROHITCH Ltd.
Hoo Farm Ind. Est. Worcester Rd.
Kidderminster, Worcs. DY11 7RA, UK
Phone: +44 (0) 1562-732010
Fax: +44 (0) 1562-732020

HOLLAND EUROPE GmbH
Altenkamp 9, D-33758
Schloss Holte-Stukenbrock, Germany
Phone: +49 (0) 5207-89560
Fax: +49 (0) 5207-895656

Copyright © October 2007-SAF-HOLLAND. All information contained in this document is correct at time of copyright and is subject to change without notification all rights reserved