


## Series launch of the new trailer disc brake SAF SBS 2220 K0 from October 2015.

SAF-HOLLAND is to launch the new 22.5" disc brake **SAF SBS 2220 K0** for the 9t axle range, developed in close cooperation with Knorr-Bremse.

The new SAF disc brake **SBS 2220 K0** is available from the 4th quarter of 2015 as an alternative to the proven SAF disc brake SBS 2220 H0, and is to replace axle versions xx9-22K01 in the mid-term.

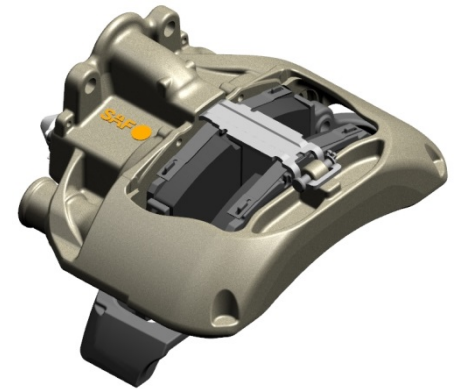

For special applications and higher tonnages, the axle models ending in -22K01 (e.g. SI/Z11-22K01) will continue to be available.

### Data for the new disc brake SBS 2220 K0:

Feature/Capacity	Value
Axle load:	9 t
Test load homologation:	10.2 t
Maximum possible braking torque:	20 kNm
Maximum permissible input force	11 kN
- max. service brake cylinder:	22"
- max. parking brake cylinder:	30"(diaphragm), or 24" (piston)
Deadweight of caliper unit including brake pads:	32kg
SAF part number left:	03 080 0087 00
SAF part number right:	03 080 0088 00
Test report no:	36102214

New axle models	Existing axle models	
<b>Rigid axles</b>		
BI9 – 22S01	BI9 – 22S	BI9 – 22K01
B9 – 22S01	B9 – 22S	B9 – 22K01
SI9 – 22S01	SI9 – 22S	SI9 – 22K01
ZI9 – 22S01	ZI9 – 22S	ZI9 – 22K01
<b>Friction-steered axles for INTRA CD and MODUL</b>		
BIL9 – 22S01	BIL9 – 22S	BIL9 – 22K01
BL9 – 22S01	BL9 – 22S	BL9 – 22K01
<b>Friction-steered axles for INTRA</b>		
BILL9 – 22S01	BILL9 – 22S	BILL9 – 22K01
BLL9 – 22S01	BLL9 – 22S	BLL9 – 22K01

Test report no. 36102214 for the SAF trailer disc brake SBS 2220 K0 will be available to you online from September 2015, as well as the results of a type 0 road test already carried out:

<http://ww1.safholland.de/sites/germany/en/sales/testreports/brakes-ece-r13/pages/default.aspx>